





The rustic charm of traditional shake with CF features

Tilcor’s CF Shake has been specifically designed for the North American market to resemble the rustic charm of traditional Shake but without the inherent ongoing issues that many home owners face. Its innovative fully “**Concealed Fastening**” system is truly a world’s first. The Tilcor CF Shake textured-finish tile features the wood-grain appearance of traditional shake. Its deep-ribbed profile is designed to enhance the shadow lines and create visual contrast. Unlike other systems, which leave gaps and screws exposed to the elements, our unique CF Shake protects all fastening elements making roofs more reliable, watertight and durable than ever before.

Extensive research and development in the design process makes Tilcor’s CF Shake not only the most water-proof stone-coated steel Shake on the market but the most realistic looking and fastest to install. Made from the highest quality raw materials using New Zealand Steel ensures the durability and strength is second to none. The CF Shake and accompanying roofing accessories are engineered to interlock and overlap to resist wind lifting and keep out the harsh elements. At less than 150 lbs. / sq., a Tilcor roof is a ‘Lightweight Roofing System’, so considerable cost savings can be achieved during new construction along with being the perfect replacement for your old existing roof. A Tilcor roof lets you improve the look and value of your home in a matter of days.

Tilcor’s textured finish provides added protection by embedding natural stone granules in an acrylic base-coat. A final clear acrylic over-glaze is applied before being oven cured at 250° F. This extremely durable UV-resistant coating enables Tilcor roofing products to withstand the harshest environments around the world. Tilcor is ISO 9001 accredited and has international tests reports, appraisals and field results confirm our products are 100% waterproof, earthquake safe, fire resistant and able to withstand hurricane-force winds of up to 120mph. A Tilcor roof will not only safeguard your investment but will also give you complete peace of mind because it’s backed by a Tilcor Limited Lifetime Warranty.

- **Concealed Fastening**
- **Innovative Interlocking**
- **Minimum Roof Pitch to 3/12**
- **Direct to Deck or Battens**
- **20 Panels per Sq.**
- **International Test Reports**
- **New Zealand Steel**
- **The fastest and easiest stone-coated steel panel system to install on the market**



Color Options



Barkwood



Charcoal Blend



Ironstone



Sierra Wood

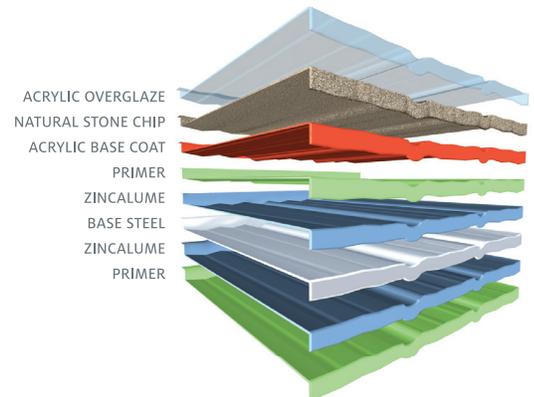


Weathered Wood

Colors in this brochure are as close to the original as modern printing process will allow.

CF SHAKE TEXTURED SPECIFICATIONS

Length of Cover	49 5/8"
Width of Cover	14 9/16"
Tiles / sq.	20 pc / sq.
Weight / Tile	7.05 lbs.
Weight / sq.	141 lbs. / sq.
Minimum Roof Pitch	3/12



LIMITED LIFETIME WARRANTY



Ross Roof Group

P +1 916 838 1940 E info.us@tilcor.com, 915 S Great Southwest Pkwy, Grand Prairie, TX, 75051; PO Box 5125, Galt, CA 95632, USA www.tilcorroofingusa.com

